


قابلیت رایبه فرم و امنیتی جهت استفاده در مراکز فوق حساس و نظامی - فاقد قابلیت دسترسی از طریق اینترنت

IP Camera

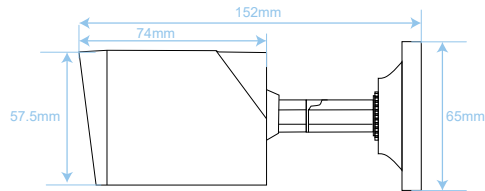

1403-S1

**2 years Silver Guarantee**

- دو سال گارانتی نقره‌ای بدون قید و شرط کی دی تی
- سه سال ضمانت پایداری کیفیت تصویر

**سایر برتری‌ها:**

- بدنه ضد آب و گرد و غبار با درجه IP67
- سرور انتقال تصویر در ایران
- پشتیبانی از H.264+ / H.265+
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند

**سایر برتری‌ها:**

**قابلیت‌های هوشمند:**

- عبور از خط
- فنس‌مجازی
- ورود به منطقه
- خروج از منطقه
- تشخیص حرکت سریع

**Camera**

Image Sensor	2MP Progressive scan Cmos Sensor (1/2.9")
CPU	Dual-Core ARM Cortex-A7@900 MHz
Lens	3.6 mm Fixed Lens @F2.0
Resolution	1920*1080 (2MP)
Available IR Range	30~40 m Smart IR SMD Technology
D/N Filter	IR cut filter with auto switch
Min Illumination	Color: 0.01 lux(AGC on) - B/W: 0.0 Lux(IR on)
Angle of View	H-FOV: 82°, V-FOV: 43°, D-FOV: 95°
Night Vision	IR
<b>Picture Adjust</b>	
Picture Function	DWDR, 2D/3D DNR, BLC, HLC, ROI, Defog
Shutter Speed	Manual (1/3 ~ 1/10.000), Auto
Image Parameter Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
S/N	> 52dB
Image Parameter	Saturation, Brightness, Contrast, Sharpness, Hue

**Video / Audio**

Video Compression	H.264+(Ultra H.264), H.265+ (Ultra H.265)
Audio Compression	N/A
Frame Rate(60Hz)	30fps@ 1080P(1920*1080), 30fps@ 960P, 30fps@ 720P
Transmission Stream	Dual Stream (Video Bit Rate:11 Kbps~10 Mbps)

**Network**

Protocols	TCP/IP, ICMP, HTTP, HTTPS, DHCP, DNS, DDNS, RTP, RTSP, NTP, UPnP, SMTP, UPnP-TM, P2P, Bonjour, IPV6
Compatibility	Onvif Ver2.6, Profile S, CGI, SDK, API
Streaming Method	Unicast, Multicast
Web Viewer	Internet Explorer
Smart Device	IOS, Android Phone & Tablet

**Function**

Recording	NVR, CMS, VMS
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	N/A
Event Action	Email, PTZ, Snapshot, Recording, Buzzer, Pop up, Show Message
Event	Motion Detection, Video Shelter
Intelligent Function	5 Smart Function Line Crossing, Area Intrusion, Region Entrance, Region Exiting, Fast Moving

**Interface**

Network	1 RJ45 (10M / 100M) Ethernet Port
Audio	Internal Mic
Alarm	N/A
CVBS	N/A
Power	PoE LAN, DC In
Control	N/A
Memory Slot	N/A

**General**

IP Rating	IP67, 2KV Surge Protection
Power Supply	DC12V ± 10%
POE Supply	IEEE802.3af - Max 6.5 Watt
Web Language	English, Persian
Dimension	152*65 mm
Weight	330 g
Operation Humidity	Humidity 95% or less (non-condensing)
Operation Temp	-30°C ~ +60°C

**Guarantee**

Product Guarantee	2 Years Silver Guarantee
MTBF	100K hrs min. MIL-HDBK-217F (25°)
Certificates	EN, CN, FCC, CFR